

Article description: Cartonplast Pool Iberian Plastic Pallet 5-Runner



Technical information:

1. Material		UV-stabilized, virgin & recycled polypropylene, injection moulded.
2. Dimensions		1200 mm + 0.25% x 1000 mm + 1% x 155 mm + 2.6% (l x w x h)
3. Weight	kg	17.5 ± 3%
4. Dynamic loading	kg	1500
5. Static loading	kg	4500
6. Rack loading	kg	850

Specifics:

One-piece, double-deck, 5 runner, pallet and pad holder corner, base film retention system (optional), shrink holder grips, reusable, cleanable, injection moulded and RFID tag embeded.


Properties of material:

Thermal resistance	normal range:	-10°C until 80 °C
Chemical resistance	resistant to:	inorganic saline solutions, acids, lyes
	Not resistant to:	halogens, organic halogen combinations
Electric properties	Insulator	Surface resistance > 10 ¹³ Ohm
Physiological properties	Almost odour neutral and flavorless	Physiologically harmless following the actual food industry related legislation

Complies with following:

The material of which the plastic pallets are made complies with the requirements of Article 11 of Directive 1994/62/EC dated December 20th, 1994 on packagings and packaging waste with regard to the concentration of heavy metals (Pb, Cd, Hg and Cr VI).

Technical drawing:

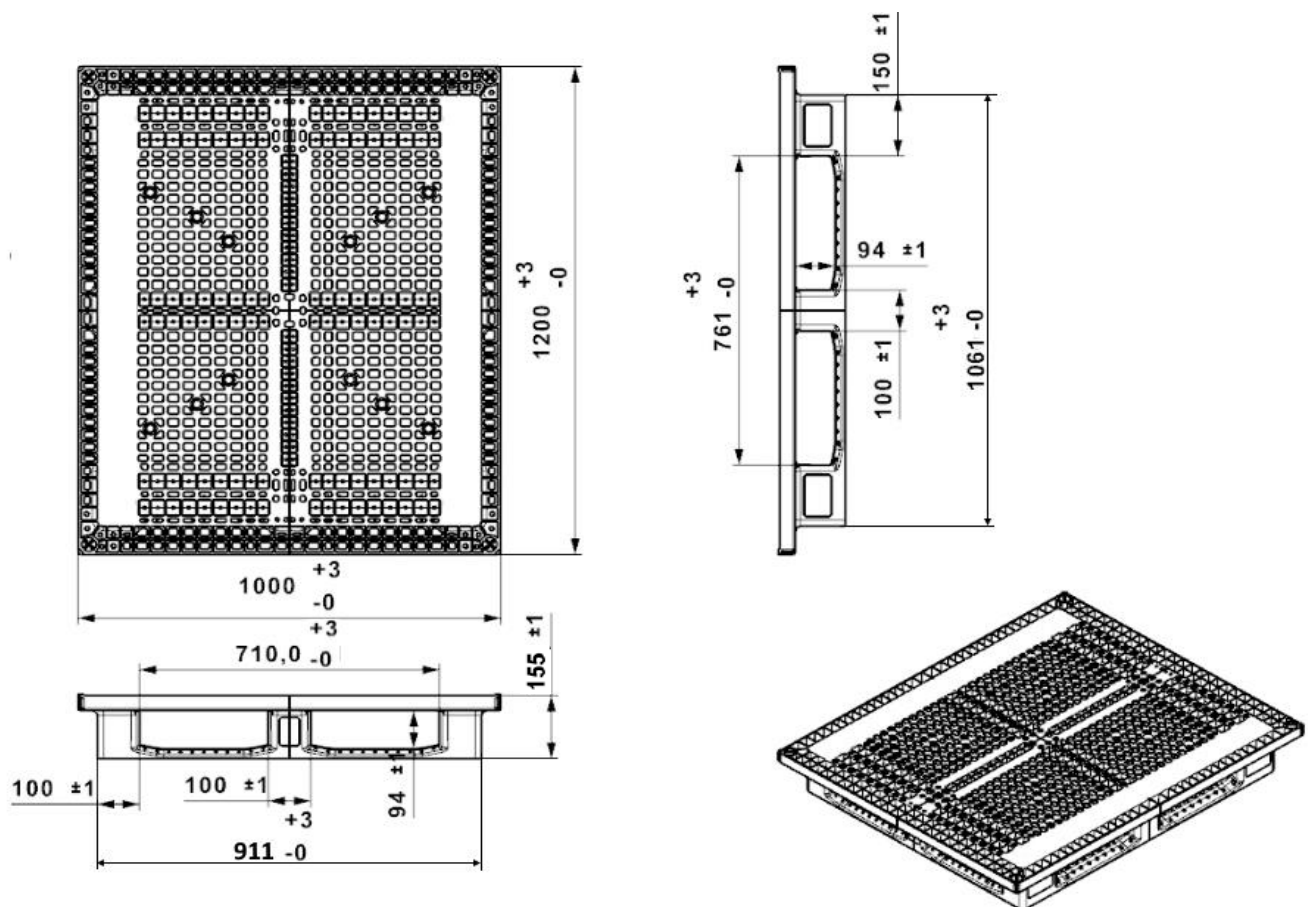

All data contained within this specification are approximate values and represent a summary of measured values at the current time. This summary is for information purposes only and does not form any commitment or constitute any right with regards to data integrity and therefore legal assurance cannot be deduced.

With regards to thermal properties, the presented values are measured under permanent use at ambient temperatures, and are demonstrated as being realistic. Where the product is not used in its usual application, then values may vary.

Without prior knowledge of products, intended use or nature of goods to be packed, no assurance is given with respect to the suitability.

Nevertheless, we guarantee the incontestable quality of our products according to our General Conditions of Sale.

The Cartonplast group of companies reserves the right to amend this specification without prior notification.

The Product Liability, in relation to compliance of the specification data, is transferred at the point of the delivery to the user.